



Review of Efficacy of Stabilization Ponds and Feasibility of Using Effluents of Wastewater Treatment of Ahvaz's Slaughterhouse for Irrigation and Disposal in Surface Waters in the Region

Sadegh Ghasemi*, Roya Mafi Gholami** and Mohsen Yazdanian***

*Young Researchers and Elite Club, Shoshtar Branch, Islamic Azad University, Shoshtar, IRAN

**Department of Civil Engineering, Ahvaz Branch, Islamic Azad University, Ahvaz, IRAN

***Department of Civil Engineering, Dezful Branch, Islamic Azad University, Dezful, IRAN

(Corresponding author: Sadegh Ghasemi)

(Received 17 September, 2014, Accepted 28 November, 2014)

ABSTRACT: A waste stabilization pond (WSP) is a hole in which household wastewater and other types of sewage are stored for long periods of time so that organic materials existing in them are deposited, decomposed and stabilized through exposure to light and heat and growth of algae and microorganisms. In WSPs, deposition and stabilization processes take place simultaneously. Such features make WSPs suitable for treating industrial sewage such as wastewaters produced by slaughterhouses, dairy plants and canned food factories. The present study sampled wastewaters collected and treated by the treatment plant of a slaughterhouse in Ahvaz and compared the relevant measured parameters with the standards set by the Environmental Protection Organization of Iran in order to determine the efficiency of WSPs in treating wastewaters and making them usable for irrigation purposes. The results indicate that Turbidity, BOD₅, PH, COD, TDS, and TSS values for the treated wastewaters stood at >1000 NTU, 912 mg/lit, 8.78, 1520 mg/lit, 1052 mg/lit, and 2180 mg/lit respectively. A comparison of these values with the standard values set by the Environmental Protection Organization of Iran revealed a significant difference. This finding shows that the wastewater treatment plant under study had a poor productivity and performance and that wastewater treated by that facility could not be used for irrigation or pumped into surface waters. Therefore, environmental management programs and solutions have been suggested in order to help control and reduce the adverse effects of treated wastewater.

Keywords: WSP, environmental standards, wastewater reuse

INTRODUCTION

The pollution caused by the activities of slaughterhouses units forms a huge part of the whole environmental pollutions and plays a very important role in creating environmental crises. Disorders caused by the wastewaters of these units change the status of aquatic ecosystems and have a negative effect on the variety of species [1]. This matter makes treatment of these sewages essential. Slaughterhouses are usually established far from the residential regions. Strategic management is not considered serious in wastewater treatment systems of slaughterhouses and does not have a proper efficiency. Therefore, slaughterhouses are considered as sources that pollute water and soil². If concentration of pollutants does not reduce to the standard limit, they can put the public health in danger by spreading pathogens and contamination of groundwater through wells absorbing sewage (as one of the common methods of disposal of slaughterhouses' sewage). It is obvious that applying proper management can provide such conditions to reduce the degree of

wastewater pollution and make sewage reuse, particularly for irrigation uses, possible [17]. Based on the theory of sustainable development, protecting environment is considered an unavoidable necessity for current and future generations and that is why the crisis of environmental pollutions has turned to a universal issue and challenge today [3,15]. In this respect, being in compliance with the environment is considered as a precondition of activity in huge levels⁴ and measuring values of spread of environmental pollutants of productive and servicing units will have a special importance. Waste stabilization ponds (WSP) are a hole in which household wastewater and other types of sewage are stored for long periods of time so that organic materials existing in them are deposited, decomposed and stabilized through exposure to light and heat and growth of algae and microorganisms. In WSPs, deposition and stabilization processes take place simultaneously. Such features make WSPs suitable for treating industrial sewage such as wastewaters produced by slaughterhouses, dairy plants and canned food factories [5-16].

Since natural processes has a basic role in sewage treatment in ponds and by considering the fact that the speed of natural treatment processes is low, a long retention time is needed for sewage treatment that this retention time is variable between few days to few months depending on weather conditions. Stabilization ponds are among cheap methods of sewage treatment and they can easily be used for treating a wide spectrum of urban and industrial sewages in regions in which there is suitable weather conditions and sufficient cheap lands. Studies that have been done in some countries indicate that waste stabilization ponds can be used as a proper pattern for treating rich sewages such as slaughterhouse sewages [14]. But comprehensive information of the performance of these units in the country is not available. According to the present study which sampled wastewaters collected and treated by the treatment plant of a slaughterhouse in Ahvaz and compared the relevant measured parameters with the standards set by the Environmental Protection Organization of Iran in order to determine the efficiency of WSPs in treating wastewaters and making them usable for irrigation purposes.

Among researches in this field that have been done before, feasibility of using effluents of wastewater treatment of industrial slaughterhouse for agricultural purposes in Qom which has been done by Alireza Najimi *et al.*, in which parameters pH, COD, BOD₅, input and output sewage have been reviewed that all parameters are in the standard limitation of Environmental Protection Organization for agricultural purposes [6]. Among other researches, we can refer to the review of environmental pollutants of wastewater of slaughterhouse units that have been studied in the "Parandak Khazar" slaughterhouse of Som'e Sara, which was done by Ms Saeyin Daneshvar *et al.* in this research the parameters COD, TDS, BOD₅, ammonium, coliform of digestive and fat and oil of wastewater treatment plants were higher than standard⁷. In a research which was done with the title of "review of efficacy of stabilization ponds in sewage treatment plans of Kermanshah's slaughterhouse" by Mr. Mehdi farzad Kia, the indexes of sewage treatment such as pH, TSS, BOD₅, COD all coliform bacteria and fecal coliform bacteria in exiting wastewater was tested and the obtained results showed that the exiting wastewater of this treatment plant with the available quality is not capable of being used in agricultural irrigation or disposal to surface waters and it has a significant statistical difference with the standards of Environmental Protection Organization of Iran⁸. And in another research with the title of "review of efficiency of sewage treatment systems of Kerman's

slaughterhouses" which was done by Ms. Leyla Javarani *et al.*, 500 tests were done on the collected samples and the parameters pH, TSS, BOD₅, COD were higher than the permitted limit by comparing them with standard values [9]. And ultimately, in a research entitled as qualitative and quantitative review of livestock and poultry slaughterhouses sewage in Lorestan province, which was done by Ms. Elham Borna *et al.*, by measuring the factors Oil, pH, COD, BOD₅ and comparing them with the results of standards of country's Environmental Protection Organization, it showed that exiting sewage of Lorestan's livestock slaughterhouses, except for industrial slaughterhouse of Khoram Abad, are more than the permitted limit and are not suitable for disposal to river and agricultural lands [10].

MATERIALS AND METHOD

A. Studied Region

Ahvaz's slaughterhouse with the daily slaughter capacity of 96 cows and Buffaloes, 1162 sheep and goats in a land with an approximate area of 8 hectares, and with an infrastructure of about 8 thousands square meters in 15th kilometer of Ahvaz - Khorram Shahr road is active in the area of comprehensive urban project. This slaughterhouse lacks blood sampling unit and blood entered in sewage and raw sewage approximately about 11000 cubic meters enters sewage treatment plants.

Type of pool treatment is stabilization and it does not perform desirably and ultimately, the wastewater caused by treatment is disposed in Karoun River. In addition, this slaughterhouse lacks sewage treatment system and it only has a corpse-burning furnace for destructing the recorded corpses and other wastes caused by the slaughter are disposed to the slaughterhouse's surrounding area.

B. Sampling

This research has been done on the input sewage and output wastewater of sewage treatment of Ahvaz's slaughterhouse. In order to review the efficiency of this treatment plant, something was arranged to remove the data from input and output sewage and it was set for the samples in cool conditions to be quickly transferred for the associated tests to the environment laboratory of the company "Ferdos Teb Shafa". In this research the parameters Turbidity, pH, BOD₅ (Biochemical Oxygen Demand), COD (Chemical Oxygen Demand), TDS (total dissolved substances) and TSS (total suspended solids) were reviewed in the samples and the feature of the method of the done tests are shown in Table 1.



Fig. 1. A view of stabilization ponds of Ahvaz's slaughterhouse.

Table 1: Features of the method of testing the measured parameters.

CONTAMINANTS (PHYSICAL,CHEMICAL,BIOLOGICAL)	UNIT	TEST METHOD
Turbidity	NTU	S.M2130 modeB
PH	-	S.M5210 modeB
BOD ₅ required oxygen for biochemical reactions	Mg/lit	S.M5210 modeB
COD required oxygen for chemical reactions	Mg/lit	S.M5220 modeB
TDS total dissolved substances	Mg/lit	S.M2540 modeC
TSS total suspended substances	Mg/lit	S.M2540 modeD

C. Results

In order to review the efficiency of this treatment plant, the parameters, which were tested in exiting wastewater, were compared with the environmental

standards and criteria of Environmental Protection Organization of Iran for disposal in surface waters or reuse of wastewaters [11].

Table 2: Results of analysis of input sewage of stabilization ponds.

CONTAMINANTS (PHYSICAL, CHEMICAL, BIOLOGICAL)	UNIT	RESULTS
Turbidity	NTU	> 1000
PH	-	8.14
BOD ₅ required oxygen for biochemical reactions	Mg/lit	1440
COD required oxygen for chemical reactions	Mg/lit	2400
TDS total dissolved substances	Mg/lit	2600
TSS total suspended substances	Mg/lit	2580

Table 3: Results of analysis of output sewage of stabilization ponds.

CONTAMINANTS (PHYSICAL,CHEMICAL,BIOLOGICAL)	UNIT	RESULTS
Turbidity	NTU	> 1000
PH	-	8.08
BOD ₅ required oxygen for biochemical reactions	Mg/lit	912
COD required oxygen for chemical reactions	Mg/lit	1520
TDS total dissolved substances	Mg/lit	1052
TSS total suspended substances	Mg/lit	2810

Analysis of the values of physiochemical contaminants of raw sewage of Ahvaz's slaughterhouse shows that the load of pollution of this raw wastewater of this treatment plant is high. Comparing the physiochemical parameters of the wastewater of Ahvaz's slaughterhouse with the environmental standards shows that the rate of TSS, COD, BOD₅ and Turbidity is higher than standard and it worrisome.

High COD and BOD₅ show that dissolved oxygen of the exiting wastewater that enters surface waters is very low and this factor causes occurrence of the utriphication phenomenon; on the other hand, high rate of suspended and dissolved solid substances lead to too much and abnormal increase of the salts in water and soil in the region which will be problematic [12].

Table 4: Standards of exiting wastewaters of sewage treatment plants (Environmental Protection Organization of Iran).

Contaminants (Physical, Chemical, Biological)	Disposal To Surface Waters Mg/lit	Disposal To Wells Mg/lit	Agricultural Uses Mg/lit
Turbidity	50	-	50
PH	6.5-8.5	5-9	6.5-8.5
BOD ₅ required oxygen for biochemical reactions	50	50	100
COD required oxygen for chemical reactions	100	100	200
TSS total suspended substances	60	-	100

DISCUSSION AND CONCLUSION

A. Evaluation of Pond's Efficiency

According to the results written in valid references, the process of waste stabilization ponds has the capability to omit 70% to 80% of BOD₅ of samples that haven't been purified. And this capability shall also be increased in the purified samples up to 90%. Reduction rate of TSS in waste stabilization ponds is possible because of the presence of algae in exiting wastewater in rates less than BOD₅; nevertheless.

This process can easily reduce the number of bacteria up to 99.9999%, number of viruses up to 99.99% and protozoa cysts and parasites up to 100% [13].

Comparing means of percentage of omission of contaminants in waste stabilization ponds of Ahvaz's slaughterhouse based on the results written in Table 5 with the acceptable values of contaminants in this process indicates that efficiencies of the available ponds are low.

Table 5: Omission rate of tested contaminants in stabilization ponds (percentage).

Contaminants (Physical, Chemical, Biological)	Omission Percentage of Contaminants
BOD ₅ required oxygen for biochemical reactions	36.66
COD required oxygen for chemical reactions	36.66
TDS total dissolved substances	59.53
TSS total suspended substances	15.50

B. Usability of Wastewater in Irrigation

Comparing the rate of contaminants in exiting wastewater and standards of Protection Organization of Iran associated with using wastewater in agricultural irrigation shows that in most cases the rates of remained

contaminants in wastewater is multiple times more than the permitted limit. According to this, using this wastewater for irrigation is in conflict with the standards of Protection Organization of Iran.

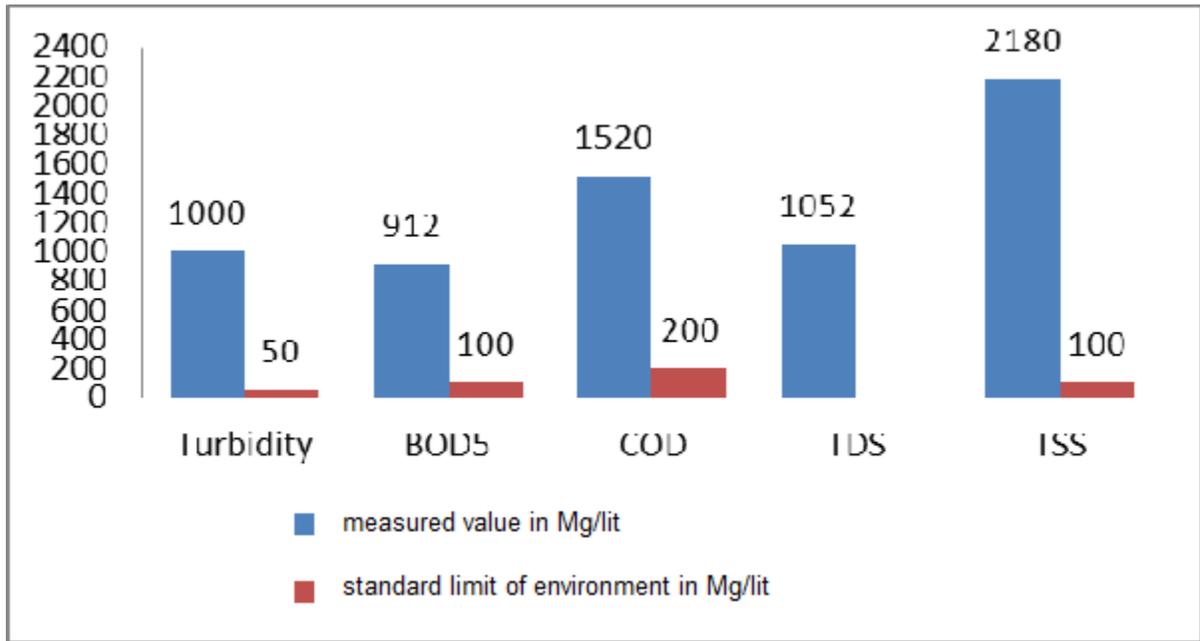


Fig. 2. Comparison of parameters of contaminants of exiting wastewater with the standards of Environmental Protection Organization of Iran for irrigation purposes.

C. Ability of Disposing Wastewater in Surface Waters

Comparing the rate of contaminants in the exiting wastewater with standards of disposing wastewater in surface waters of Environmental Protection Organization of Iran shows that in most cases the rate of remained contaminants in the wastewater is multiple

times more than the permitted limit. According to this, disposal of exiting wastewater with this compound in river is in conflict with the principles of country's environmental protection and leads to pollution of river's water.

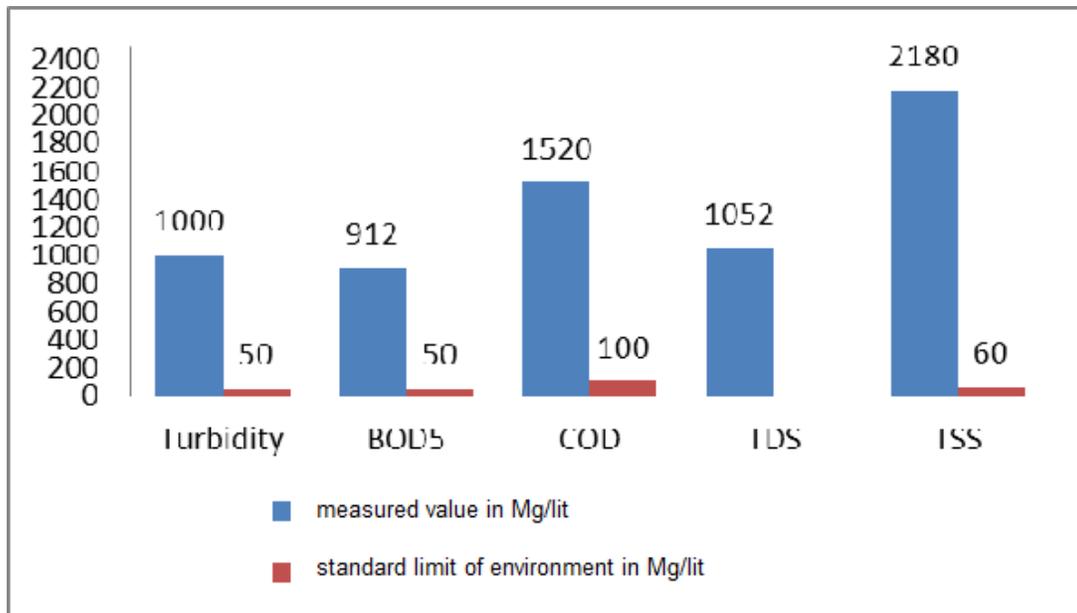


Fig. 3. Comparison of parameters of contaminants of exiting wastewater with the standards of Environmental Protection Organization of Iran for disposal in surface waters.

D. Explanation of Problems and Strategies

Given the reviews that have been done, Ahvaz's slaughterhouse has not considered the environmental actions and this slaughterhouse's exiting wastewater makes the load of environmental pollution twice more. Low efficiency and increase of the volume of the exiting wastewater are the most important problems of this treatment plant. In most of the slaughterhouses of Iran, due to lack of use of proper technology, preliminary separation of blood for producing side products such as blood powder does not take place; therefore, blood enters the sewage system and increase the organic load and degree of sewage pollution which will consequently increase the side costs (environmental effects and costs of water treatment). Since establishing efficient systems of sewage treatment is an unavoidable necessity and needs a considerable investment, regulatory organizations can make establishment of industrial units a priority by considering the national and regional conditions and in the form of development programming model and obligate contaminant units to comply with the environmental standards. Also developing and implementing proper encouraging and punishing policies, development of industrial units, privatization and changing the role of government from outsourcer to policy maker and supervisor, will be of crucial help to the improvement of environmental situation of the region. The significant point is that of the necessity and value of environmental issues became clear for industry owners, they will certainly become guardians of the ecosystems and we could hope that the policy of "sustainable development" replaces development with each cost and method.

The provided treatment system shall response to environmental standards and requirements and shall be suitable for the capacity of slaughterhouse, climatic conditions, personnel's skill and implementation costs. One of the most suitable methods for treating slaughterhouses' sewage is simultaneous use of physical and biological treatment.

Given the studies which have been done, the most important program of controlling and reducing wastewater contaminants of slaughterhouses is announced as follows:

- (i) Using chlorination method by intelligent systems instead of manual method for reducing microbial load.
- (ii) Using anaerobic sequencing batch reactor (ASBR) in treating slaughterhouse' wastewater.
- (iii) Using new chemical treatment systems.
- (iv) Reconstructing dirt stuck systems, secondary treatment, fat retention and filtration of the slaughterhouse.
- (v) Using nanotechnologies in treating sewage of poultry Industry.

(vi) Using ozone in order to reduce the microbial load of corpses and increase the durability of the produced products.

(vii) Using sewage treatment systems of activated sludge in the slaughterhouse and using the resulting water for agricultural uses.

REFERENCES

- Nejati, Shams et al, Environmental review of Guilan province's livestock slaughterhouses by using GIS system, Third National Conference of environmental crises and strategies of their improvement, 1385.
- Agha Reza, Heshmat Allah, (1386). Entrance of slaughter wastes to watershed basins, contamination factor of water and soil, *Fourth National Conference of Science and Engineering of Iran's watershed, drainage areas management*, 1386.
- Darijani, Ali and David Harvey, (1386). Review of pollutants of environment wastewater of slaughterhouse units, *Journal of Agricultural Sciences and Natural Resources, Volume XV, 1386, first issue, Special issue of natural resources*.
- Dehghanian, S. and Zahra Farajnezhad, (1379). Environmental Economics for Non-Economists: techniques and policies for sustainable development, Ferdosi Mashhad University Publications, 1379.
- Mara, D., (1377). Guide to designing waste stabilization ponds in Iran, translated by Shaghaghi, S., Asadi, R, Company of Water and Wastewater Engineering of Country, page 6-1, Tehran.
- Najimi, Reza (1389). Feasibility of using effluents of wastewater treatment of industrial slaughterhouse for agricultural purposes (Case study of Qom province), Scientific conference on water challenge in Qom province, Qom, Qom university, 1389.
- Daneshvar, Saeyin et al, (1391). Review of environmental pollutants of wastewater of slaughterhouse units that have been studies in the "Parandak Khazar" slaughterhouse of Som'e Sara, first national conference on environmental protection and programming, Hamedan, 1391, Islamic Azad University of Hamedan, Company of "Ham Andishan-e Mohite Ziste farda".
- Farzad Kia, Mehdi, (1383). Review of efficacy of stabilization ponds in sewage treatment plans of Kermanshah's slaughterhouse, 1383.

- Javarini, Leyla, Mohammad Malakootian, and Masoud Noshadi, (1388), Review of efficiency of sewage treatment systems of Kerman's slaughterhouses, Third Specialized Conference of Environmental Engineering, Tehran, Tehran University, Department of the Environment, 1390.
- Borna, Elham et al, Qualitative and quantitative review of livestock and poultry slaughterhouses sewage in Lorestan province and providing management and technical strategies, Fifth Specialized Conference of Environmental Engineering, Tehran, Tehran University, Department of the Environment.
- Environmental Protection Organization of Iran, (1378), "Environmental regulations and standards", published by Environmental Protection Organization of Iran, page 6-5, Tehran.
- Erfan Manesh, Majid Afyooni, Environmental pollution (water, soil and air), (1388), "Arkan-e Danesh" publications, sixth edition, page 81.
- World Health Organization, (1375). Waste stabilization ponds (Design and Implementation principles). "Translation: Nadafi K, Nabi Zadeh, R., Page 97 - 100, Tehran.
- Eckenfelder, W. W., (1989). "Industrial Water Pollution Control", Mc Graw-Hill, 2nd Edi., pp:189-193, New York.
- Kupusovic, T., Midzic, S., Silajdzic, I., and Bjelavac, J. (2007). Cleaner production measures in smallscale slaughterhouse industry: case study in Bosnia and Herzegovin. *Journal of cleaner production*, **15**: 4,278-383.
- Reed, SC., Crites, R.W., and Middle brooks, E. J., (1995). "Natural Systems for Waste Management and Treatment", 2nd ed, pp:75-90, Mc Graw-Hill, New York.
- Stoop, M.L.M. (1999). Application of a mathematical calculation model to reduce slaughterhouse (water) pollution in developing countries, *Technovation*, **19**: 5.323-331.