



## A Study on Clustering Architecture and Protocol in Sensor Network

Pooja Rani\*, Jagdeep Kaliraman\*\* and Mahinder Paul Malhotra\*\*

\*Student, M. Tech, Department of ECE RIMT, CHIDANA (HR), INDIA

\*\*Associate Professor, M.Tech, Department of ECE, ACEM, Faridabad, (HR), INDIA

(Corresponding author: Pooja Rani)

(Received 04 November, 2014 Accepted 05 December, 2014)


(Published by Research Trend, Website: [www.researchtrend.net](http://www.researchtrend.net) )

**ABSTRACT:** Sensor network is the one of the most common used sensor network defined with energy nodes. This kind of network has large number of tiny sensors in small geographical area. Because of the energy limitation, these networks are constructed under some QoS optimized architecture. One of such architecture is Clustered Architecture. According to this architecture, complete network is divided in small area segments and each segment is controlled by a controller node called cluster head. This paper is focused on the study clustering architecture and supported protocol.

**Keywords:** Clustered Architecture, Energy Specific, Qos Optimization,

### I. INTRODUCTION

A Sensor network is defined with small sensing devices called sensor nodes with some limitations and qualities. The qualities of sensor nodes includes the sensing capability, effective computation on sensed data, its conversion to different forms and broadcasting the information with outer world. The sensor networks are constructed with specialized infrastructure. This network is defined with infrastructure less network, dynamic topology specification, task specialization etc [1, 2]. The basic features of sensor network are shown in figure 1.

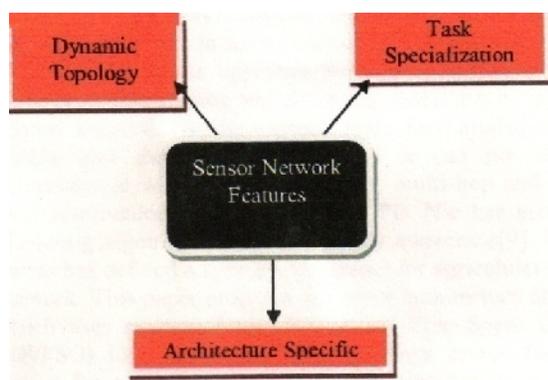

**Fig. 1.** Sensor Network Features.

In sensor network nodes are distributed over the network with energy specification.

These nodes collect the information from the environment and pass this information to the central node for processing. Sensor network consist the small components to sense the environmental characteristics and to perform the It is unlikely that an approximation ratio asymptotically better than 0 (log A) can be found for the connected dominating the problem.

Das and Bharghavan provided distributed implementations of the algorithm of Guhs and Khuller for constructing connected dominating sets in ad-hic networks. These distributed algorithms generate the same connected dominating sets asw their centralized counterparts and, thus, have exactly the same approximation ratio since they utilize central coordinates to oversee the entire exeution. To address the issue of non – localized computation on distributed algorithm of Das and Bharghavan, Wu and Li presented a localized distributed algorithm for finding small connecting sets in which each node only needs to know its distance two neighborhoods. The algorithm consists of two marking phases. Initially, each vertex is marked F to indicate that it is not in the connected dominating sets. In phase one, a vertex marks itself T if any two of its neighbors are directly connected. This process marks all vertexes that can be potentially included in a connected dominating set.

In this paper, an effective cooperative communication is suggested over the sensor network. In this section, the description of clustered network is defined along with cluster formation and the communication in clustered network. In section II, the work defined by the earlier researchers is discussed. In section III, the proposed work is defined along with algorithm. In section IV, the results obtained from the work are presented.

## II. REVIEW OF LITERATURE

Christine Jardak has defined a work to improve the application for sensor network. Examples of the scenarios covered are patient monitoring, structural monitoring, vehicular applications and environmental monitoring. Author also present results from Presented ongoing work towards developing a highly scalable framework for storing and processing data obtained from planet-scale WSN deployments [1]. An Analysis on ACR (adaptive Cluster Ratio) in Wireless Sensor Networks". Mathematically, analyze relation between cluster ratio and path loss in a cluster and an optimal cluster ratio is developed to provide promising channel and minimize packet loss. The simulation results show that the proposed optimal cluster ratio effectively guarantees packet reception rate in WSN [2]. DongyuLee [3] presented a game theory based approach for cluster formation in sensor network. Author discusses the use of Nash bargaining solution (NBS) for analyzing clustering based sensor network. Author model the energy consumption in the cluster members along with that for data transmission. Authors do not consider the energy of cluster heads and sink node because the energy consumption of cluster heads can be solved by a similar scheme with that of cluster members [3]. VivekKatiyar has defined a work on clustering in heterogeneous network. Author propose an energy efficient multilevel clustering protocol for HWSNs. Author simulate and compare Presented proposed protocol with existing multilevel clustering protocol EEMC for homogeneous WSN. Simulation results demonstrate that Presented proposed protocol outperforms EEMC [4]. Sabbir Mahmud presented a work on the deployment of sensor network with K base station. Author propose a unified heuristic for both problems. In the special case of one static base station, Author proposes an optimal, polynomial time algorithm. In the special case of one mobile base station, Author presents an efficient heuristic. Authors have simulated Presented optimal algorithm, Presented heuristics, and the Mindiff-RE heuristic proposed by Azad and Chock lingam [5]. A work on energy effectiveness in sensor network with node localization and routing is defined by Christian Dominguez Median in year 2011. As the size of the network increases, this

problem becomes more complex due the amount of sensor nodes in the network. The meta-heuristic Ant Colony Optimization (ACO) has been proposed to solve this issue. ACO based routing algorithms can add a significant contribution to assist in the maximization of the network lifetime and in the minimization of the latency in data transmission, but this is only possible by means of an adaptable and balanced algorithm that takes into account the WSN main restrictions[6]. HaniaAoudia has defined a work on hierarchical routing in sensor network. Author propose a critical improvement of the LEACH (Low-Energy Adaptive Clustering Hierarchy) routing protocol for the optimization of the energy consumption as well as memory occupation of Wireless Sensor Network (WSN) [7].

AnandPandya [8] has defined an energy effective routing and clustering approach in sensor network. Authors have proposed a novel three phase approach for energy efficient routing using multipath routing and clustering technique. In wireless sensor network (WSN), sensor node has limited battery a supply and transmission range, so it can not directly communicate with sink node. Hence, multi-hop and multi-path communication is essential [8]. Pin Nie has presented clustering algorithm under the energy awareness[9]. MilindPande has defined hybrid architecture for agricultural sensor network. This paper proposes the novel architecture of WSN which uses existing Radio Frequency/ Free Space Optical (RF/FSO) link model and hybrid energy source for base station for precision agriculture [10].

## III. PROPOSED WORK

Energy efficiency is the most required quality in a sensor network where each node consumes some energy with each transmission over the network. Energy efficiency is required to improve the network life. The presented work is defined in the same direction to improve the network life. In this work, the energy efficiency is improved for the cooperative communication in dense clustered network. When a clustered is defined by performing the random selection of clustered nodes, there are much chances of non-uniform distribution of these cluster heads. The base stations communicate to these cluster heads directly and the cluster heads communicate with nodes. But the range of the base station is also fixed, because of this sometimes these cluster heads communicate with base station by the help of other communication over the network. The presented work is to improve the cooperative communication with the inclusion of relay nodes between the cluster head and the base station, if the cluster head is not in range.

The work is about to perform the effective selection of these relay nodes respective to distance and energy. A relay node can be placed between two cluster heads or between cluster heads and base station. As the clustering will be performed, the relay nodes will also identified and placed over the network. As the communication performed over the network and the cluster head die, re-clustering over the network will be performed and along with this new relay node selection will be performed. The presented work is about to identify the relay nodes over the network and to improve the network life. The Algorithm defined in this work are given here under

#### A. Cooperative Clustered Routing

1. Define N Number of mobile Nodes in the network with specific parameters in terms of energy, transmission rate etc.
2. For  $i=1$  to N
3. {
4. If (Node Type (Node(i))='N')
5. {
6. Find the Cluster head in Range called CNode
7. Perform Communication between Node(i) and CNode
8. Set CNode as Source and Base as Destination
9. Set CurNode as the current node
10. Find M Neighbor Cluster Nodes of Nodes
11. Set Path=CurNode
12. While (CurNode $\neq$ Base)
13. {
14. Find the Minimum Energy, Load and Distance Node among Neighbor List called node)
15. Set j as CurNode
16. Path=Path U j
16. }
17. }
18. Return Path
19. }

#### B. Flat Base Station Effective Routing

1. Define N Number of Mobile Nodes in the network with specific parameters in terms of energy, transmission rate etc.
2. Define the Base station and hotspot area range
3. For  $i=1$  to N
4. {
5. If(Dist(Base, Node(i)) $\leq$ HotSptRange)
6. {
7. Set Node(i) as Source and Base as Destination

8. Set CurNode as the current node
9. Find M Neighbor Nodes of Nodes
10. Set Path=CurNode
11. While (CurNode $\neq$ Base)
12. {
  - For (j=1 to M)
    - {
    - Energy(Neighbor(i))
    - Distance(Neighbor(i))
    - Load(Neighbor(i))
    - }
13. Find the Minimum Energy, Load and Distance Node among Neighbor List called node j
14. Set j as CurNode
15. Path=Path U j
16. }
17. Return Path
18. }

#### IV. RESULTS

The presented work is implemented in MATLAB environment. The analysis of work is done under four main parameters called Dead Node Analysis, Alive Node Analysis, and Number of Packets Transmitted in each round, Aggregative communication over the network. These results are presented in the form of graphs shown here under Here the results are defined in terms of dead node analysis. The comparison of presented approach is performed with normal clustering approach. Here figure 1 has showed the comparison of proposed work under dead node. Here x axis represents the rounds and y axis represents dead node. The results show that the presented work has improved the network life. These results are presented in the form of graphs, dead node analysis. The comparison of presented approach is perform with normal clustering approach.

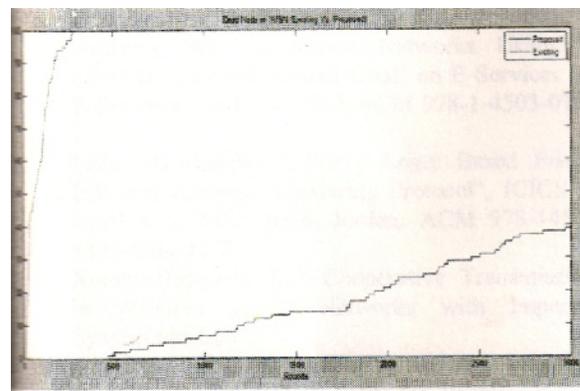


Fig. 2.

Here figure 2 has showed the comparison of proposed work under dead node. Here x axis represents the rounds and y axis represents dead node. The results show that the presented work has improved the network life.

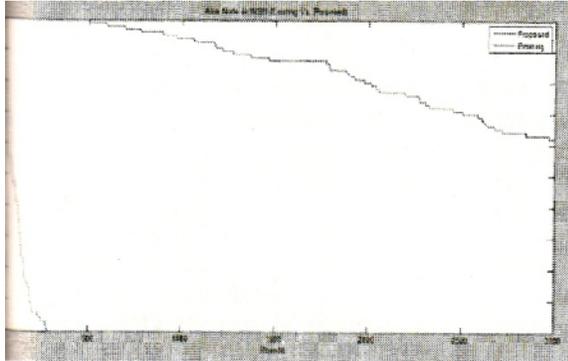


Fig. 3.

Here figure 3 has showed the comparison of proposed work under alive node. Here x axis represents the rounds and y axis represents alive node. The results shows that the network resides for more number of rounds in proposed work.

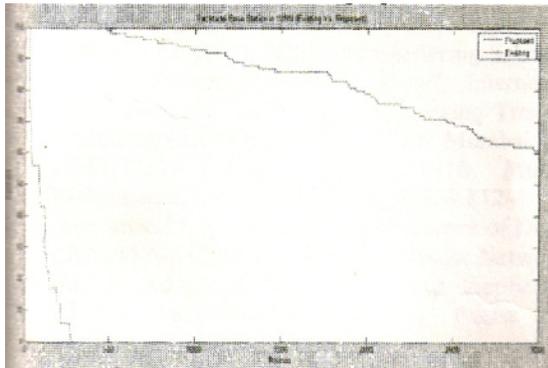


Fig. 4.

Here Fig. 4 is showing the total packet communication over the network. The result shows that the presented work has improved the packet communication upto an extent. Here figure 5 is showing the packet communication in each round. As then a node resides for more time in proposed work, the network communication in each round in increased.

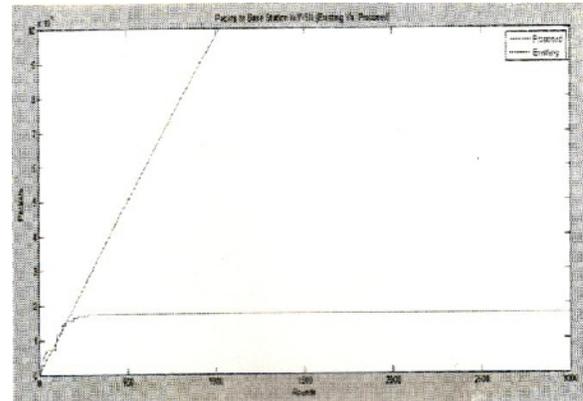


Fig. 5.

## V. CONCLUSIONS

In this paper, an effective cooperative communication in clustered sensor network is presented. The work is defined by defining the base station limit to perform direct communication with sensor nodes. The results shows that the presented work has improve the network life and communication.

## REFERENCES

- [1]. Marcelo P. Sousa," Low-Energy Selective Cooperative Diversity with ARO for Wireless Image Sensor Networks". 978-1-4244-3574-6/10©2010 IEEE
- [2]. Marcelo Portela Sousa," Ant Colony Optimization with Fuzzy Heuristic Information Designed for MSWiM'11, October 31 – November 4, 2011, Miami, Florida, USA, and ACM 978-1-4503-0898-4/11/10
- [3]. Neetesh Purohit," A New Scheme for Cooperative Communication in LEACH based Wireless Sensor Network", 2011 International Conference on Computational Intelligence and Communication Systems 978-0-7695-4587-5/11©2011 IEEE
- [4]. Mohamed Elhawary," Energy-Efficient Protocol for Cooperative Networks", IEEE/ACM TRANSACTIONS ON NETWORKING.VOL. 19, NO. 2, APRIL 2011 1063-6692© 2011 IEEE
- [5]. Zhu Yong," A Energy-Efficient Clustering Routing Algorithm Based on Distance and Residual Energy for Wireless Sensor Networks", 2012 International Workshop on Information and Electronics Engineering (IWIEE) 1877-7058 © 2011.

- [6]. Handy M. Abdulsalam," Data Aggregation for Evolving Wireless Sensor Networks Using W-LEACH", Secornd Kuwait Conf. on E-Services and E-Systems April 5-7, 2011 ACM 978-1-4503-0793-2
- [7]. Feda' Al-Maaqbeh," Fuzzy Logic Based Energy Efficient Adaptive Clustering Protocol", ICICS'12, April 3-5, 2012, Irbid, Jordan. ACM 978-14503-1327-8/04/2012.
- [8]. Xiaohue (Edward) Li," Cooperative Transmissions in Wireless Sensor Networks with Imperfect Synchronization".
- [9]. Geoffrey Werner Challen," IDEA: Integrated Distributed Energy Awareness for Wireless Sensor Networks", Mobisys'10, June 15-18, 2010, San Francisco, California, USA. ACM 978-1-60558-985-5/10/06
- [10]. D A Vidhata," Performance Evaluation of Low Energy Adaptive Clustering Hierarchy Protocol for Wireless Sensor Networks", International Conference and Workshop on Emerging Trends in Technology (ICWET 2010) – TCET, Mumbai, India ICWET'10, February 26-27, 2010, Mumbai, Maharashtra, India. ACM 978-1-60558-812-4
- [11]. HaniaAoudia," Hierarchical Routing Approach-Based Energy Optimization in Wireless Sensor Networks", MobiWac'12, October 21-22, 2012, Paphos, Cyprus. ACM 978-1-4503-1623-1/12/10
- [12]. Suraj Sharma," A Survey on Secure Hierarchical Routing Protocols in Wireless Sensor Networks", ICCCS'11 February 12-14, 2011, Rourkela, Odisha, India ACM 978-1-4503-0464-1/11/02
- [13]. U S Sutar," An Energy Efficient Hierarchical Multiple Backup Cluster Head Algorithm for Wireless Sensor Networks", international Conference and Workshop on Emerging Trends in Technology (ICWET 2010) – TCET, Mumbai, India ICWET'10, February 26-27, 2010, Mumbai, Maharashtra, India. ACM 978-1-60558-812-4
- [14]. B Sethi," An Energy-Efficient Clustering Scheme to Prolong Sensor Network Lifetime", International Conference and Workshop on Emerging Trends in Technology (ICWET 2010) – TCET, Mumbai, India ICWET'10, February 26-27, 2010, Mumbai, Maharashtra, India. ACM 978-1-60558-812-4.
- [15]. B Sethi," An Energy-Efficient Clustering Scheme to Prolong Sensor Network Lifetime", International Conference and Workshop on Emerging Trends in Technology (ICWET 2010) – TCET, Mumbai, India ICWET'10, February 26-27, 210, Mumbai, Maharashtra, India. ACM 978-1-60558-812-4.
- [16]. Jose Anand," Analyzing the Performance of Diverse LEACH Algorithms for Wireless Sensor Networks", *Int. J. Advanced Networking and Applicatons (IJANA)* 1610 Volume: **04** Issue: 03 Pages: 1610-1615(2012) ISSN : 0975-0290.