



## A Review in Multiple Modulation Techniques 16 and 64 QAM MIMO-OFDM BPSK-QPSK-PSK SYSTEM

*Pratima Sharma, Bhaskar Singh and Pushpraj Singh Tanwar*

*Department of Electronic and Communication Engineering,  
RITS, Bhopal, (MP), India*

*(Corresponding author: Pratima Sharma)*

*(Received 05 March, 2014 Accepted 12 June, 2014)*

**ABSTRACT:** This paper present the review of Wireless communication systems suffer from fading and signal attenuation due to the mobility factor associated with it. OFDM (Orthogonal Frequency Division Multiplexing) is a multicarrier technique that offers high spectral efficiency. MIMO (Multiple Input Multiple Output) configuration provides enhanced capacity with the same transmit power. OFDM combined with MIMO offers increased diversity gain and system capacity in time variant and frequency variant channels. MIMO- OFDM configuration is found to perform better against multi-path fading and the varying channel conditions, than the conventional technologies. Precoding is a new technique that can be applied which helps to improve the performance of a MIMO OFDM system. In this paper, the BER performance of a MIMO-OFDM system using precoding is simulated for BPSK, QPSK, 16 PSK and 16 QAM modulation formats. The objective of this paper is to show the information about the improvement of channel estimation accuracy in MIMO-OFDM system. The MIMO-OFDM system is the combination of the MIMO technique and OFDM technique, which is enhancing the capacity, improve the link reliability high data rate transmission for future broadband wireless communication and also use for avoid Inter Symbol Interference (ISI).

**Keywords:** Channel estimation, MIMO OFDM, IDFT, DFT.

### I. INTRODUCTION

OFDM is a multi carrier transmission technique in which data is transmitted on a set of orthogonal independent sub carriers. The wastage of bandwidth due to guard bands is eliminated in OFDM systems along with improvement in performance in multi path environment. In an OFDM system, the high data rate signal is split into several parallel lower data rate streams and transmitted over several narrow band sub carriers. The advantage of using OFDM is that it transforms a frequency selective fading channel into multiple narrow flat fading parallel sub channels. An OFDM system increases the symbol duration in the parallel sub channels and use of cyclic prefix helps to reduce the effect of ISI caused earlier by delay spread. MIMO uses multiple antennas at the transmitter and receiver [1] and its advantages include enhanced capacity with the same transmit power, reduced bit error rate etc. Both rate gains and diversity gains can be achieved using a MIMO system by either transmitting multiple data using different antennas or by transmitting the same data through different antennas so that the effects of fading can be minimised [2]. MIMO OFDM is an air interface system which is used in fourth generation mobile cellular wireless systems. It is mainly used for high data rate transmissions and in frequency selective channels. According [1], in broadband wireless channel multiple input multiple output (MIMO) communication system combine with the orthogonal

frequency division multiplexing (OFDM) modulation technique can achieve reliable high data rate transmission and to mitigate inter symbol interference. High data rate system suffer from inter symbol interference (ISI). To estimate the desire channel at the receiver channel estimation techniques are used and also enhance system capacity of system. The MIMO-OFDM system uses to independent space-time codes for two sets of two transmit antennas. To improve channel estimation accuracy in MIMO-OFDM system because channel state information is required for signal detection at receiver and its accuracy affects the overall performance of system and it is essential for reliable communication. This presents channel estimation scheme based on Leaky Least Mean Square (LLMS) algorithm proposed for BPSK-QPSK-PSK MIMO OFDM System. By designing this we analyze the terms of the Minimum Mean Squares Error (MMSE), and Bit Error Rate (BER) and improve Signal to Noise Ratio. According [5], the channel estimation technique for OFDM systems based on pilot arrangement are investigated. The channel estimation based on comb type pilot arrangement is studied through different algorithm for both estimating channel at pilot frequencies and interpolating the channel. The estimation of channel at pilot frequencies is based on LS and LMS while the channel interpolation is done using linear interpolation, second order interpolation, low pass interpolation, spline cubic interpolation, and time domain interpolation.

Time-domain interpolation is obtained by passing to time domain through IDFT (Inverse discrete fourier transform), zero padding and going back to frequency domain through DFT (Discrete fourier transform). In addition, the channel estimation based on block type pilot arrangement is performed by sending pilots at every sub-channel and using this estimation for a specific number of following symbol. Also implemented decision feedback equalizer for all sub-channels followed by periodic block-type pilots. Compare the performances of all schemes by measuring bit error rate with 16QAM, QPSK, DQPSK, and BPSK as modulation schemes and multipath Rayleigh fading and AR based fading channels as channel models. According [6], present an improved channel estimation algorithm for orthogonal frequency-division multiplexing mobile communication systems using pilot sub carriers. This algorithm is based on a parametric channel model where the channel frequency response is estimated using an L-path channel model. In the algorithm, employ the ESPRIT (estimation of signal parameters by rotational invariance techniques) method to do the initial multi path time delays acquisition and propose an interpath interference cancellation delay locked loop to track the channel multi path time delays. With the multi path time delays information, a minimum mean square error estimator is derived to estimate the channel frequency response. It is demonstrated that the use of parametric channel model can effectively reduce the signal subspace dimension of the channel correlation matrix for the sparse multi path fading channels and, consequently, improve the channel estimation performance.

## II. WORKING

MIMO – OFDM system, the advantages of both MIMO and OFDM systems can be achieved together. In a MIMO system for wireless communication, a number of transmitting and receiving antennas are spatially arranged in such a way that the maximum system capacity is achieved. The bandwidth is efficiently utilized resulting in an increased channel capacity in a MIMO system. But the disadvantage is the increase in complexity of the system as the number of antennas increases. The wireless channel is a time varying channel which behaves differently for different frequencies. The advantages of MIMO systems are exploited by using space time coding and spatial multiplexing techniques. The spectral efficiency can be improved by using spatial multiplexing techniques [3][4]. The capacity of MIMO – OFDM system can be significantly improved by taking into account the channel state information at the transmitter side. This technique is known as precoding technique, where the transmitted signal vector through the antennas is weighted by a factor depending on the channel conditions.

This matrix is known as the precoding or the channel matrix. Once this is obtained, the number of independent channels with less correlation between them can be obtained by applying singular value decomposition to the channel matrix and finding the number of significant singular values. Information about the channel estimation through the different technique. The limitation of previous work is that it use the BPSK-QPSK-PSK MIMO-OFDM System for channel estimation by used Leaky Least Mean Square (LLMS) Algorithm. Which is reduce the BER and increase the capacity, but this is not reduce the more Bit Error Rate. However to overcome on these problem a work is proposed for increasing the capacity of channel and reduce the BER by the use of Channel Estimation BPSK-QPSK-PSK 16 & 64 QAM MIMO-OFDM System.

### A. Phase-shift-keying (PSK)

Phase-shift-keying (PSK) is a digital modulation scheme that conveys data by changing, or modulating, the phase of a reference signal (the carrier wave). Any digital modulation scheme uses a finite number of distinct signals to represent digital data. PSK uses a finite number of phases, each assigned a unique pattern of binary digits. Usually, each phase encodes an equal number of bits. Each pattern of bits forms the symbol that is represented by the particular phase. The demodulator, which is designed specifically for the symbol-set used by the modulator, determines the phase of the received signal and maps it back to the symbol it represents, thus recovering the original data.

### B. Binary-phase-shift-keying (BPSK)

Binary-phase-shift-keying (BPSK) (also sometimes called PRK, phase reversal keying, or 2PSK) is the simplest form of phase shift keying (PSK). It uses two phases which are separated by  $180^\circ$  and so can also be termed 2-PSK. It does not particularly matter exactly where the constellation points are positioned, and in this figure they are shown on the real axis, at  $0^\circ$  and  $180^\circ$ . This modulation is the most robust of all the PSKs since it takes the highest level of noise or distortion to make the demodulator reach an incorrect decision. It is, however, only able to modulate at 1 bit/symbol and so is unsuitable for high data-rate applications. In the presence of an arbitrary phase-shift introduced by the communications channel, the demodulator is unable to tell which constellation point is which. As a result, the data is often differentially encoded prior to modulation. BPSK is functionally equivalent to 2-QAM modulation.

### C. Quadrature-phase-shift-keying(QPSK)

Quadrature-phase-shift-keying(QPSK) sometimes this is known as quadriphase PSK, 4-PSK, or 4-QAM.

(Although the root concepts of QPSK and 4-QAM are different, the resulting modulated radio waves are exactly the same). With four phases, QPSK can encode two bits per symbol, with Gray coding to minimize the bit error rate (BER) sometimes misperceived as twice the BER of BPSK. QPSK can be used either to double the data rate compared with a BPSK system while maintaining the same bandwidth of the signal, or to maintain the data-rate of BPSK but halving the bandwidth needed. The advantage of QPSK over BPSK becomes evident: QPSK transmits twice the data rate in a given bandwidth compared to BPSK - at the same BER.

#### D. Quadrature amplitude modulation (QAM)

QAM is both an analog and a digital modulation scheme. It conveys two analog message signals, or two digital bit streams, by changing (modulating) the amplitudes of two carrier waves, using the amplitude-shift keying (ASK) digital modulation scheme or amplitude modulation (AM) analog modulation scheme. The two carrier waves, usually sinusoids, are out of phase with each other by  $90^\circ$  and are thus called quadrature carriers or quadrature components hence the name of the scheme. The modulated waves are summed, and the resulting waveform is a combination of both phase-shift keying (PSK) and amplitude-shift keying (ASK), or (in the analog case) of phase modulation (PM) and amplitude modulation. In the digital QAM case, a finite number of at least two phases and at least two amplitudes are used. PSK modulators are often designed using the QAM principle, but are not considered as QAM since the amplitude of the modulated carrier signal is constant. QAM is used extensively as a modulation scheme for digital telecommunication systems.

Arbitrarily high spectral efficiencies can be achieved with QAM by setting a suitable constellation size, limited only by the noise level and linearity of the communications channel. QAM is being used in optical fiber systems as bit rates increase; QAM16 and QAM64 can be optically emulated with a 3-path interferometer.

#### E. Multiple-input and multiple-output (MIMO)

MIMO the transmitter and receiver to improve communication performance. It is one of several forms of smart antenna technology. MIMO technology has attracted attention in wireless communications, because it offers significant increases in data throughput and link range without additional bandwidth or increased transmit power. It achieves this goal by spreading the same total transmit power over the antennas to achieve an array gain that improves the spectral efficiency (more bits per second per hertz of bandwidth) and/or to achieve a diversity gain that improves the link reliability (reduced fading).

Because of these properties, MIMO is an important part of modern wireless communication standards such as IEEE 802.11n (Wi-Fi), 4G, 3GPP Long Term Evolution, WiMAX and HSPA+.<sup>[2]</sup>

#### F. Orthogonal-frequency-division-multiplexing

OFDM is a method of encoding digital data on multiple carrier frequencies. OFDM has developed into a popular scheme for wideband digital communication, whether wireless or over copper wires, used in applications such as digital television and audio broadcasting, DSL Internet access, wireless networks, powerline networks, and 4G mobile communications. OFDM is a frequency-division multiplexing (FDM) scheme used as a digital multi-carrier modulation method. A large number of closely spaced orthogonal sub-carrier signals are used to carry data<sup>[4]</sup> on several parallel data streams or channels. Each sub-carrier is modulated with a conventional modulation scheme (such as quadrature amplitude modulation or phase-shift keying) at a low symbol rate, maintaining total data rates similar to conventional single-carrier modulation schemes in the same bandwidth. The primary advantage of OFDM over single-carrier schemes is its ability to cope with severe channel conditions (for example, attenuation of high frequencies in a long copper wire, narrowband interference and [9] frequency-selective fading due to multipath) without complex equalization filters. Channel equalization is simplified because OFDM may be viewed as using many slowly modulated narrowband signals rather than one rapidly modulated wideband signal. The low symbol rate makes the use of a guard interval between symbols affordable, making it possible to eliminate intersymbol interference (ISI) and utilize echoes and time-spreading (on analogue TV these are visible as ghosting and blurring, respectively) to achieve a diversity gain, i.e. a signal-to-noise ratio improvement. This mechanism also facilitates the design [6] of single frequency networks (SFNs), where several adjacent transmitters send the same signal simultaneously at the same frequency, as the signals from multiple distant transmitters may be combined constructively, rather than interfering as would typically occur in a traditional single-carrier system.

#### G. MIMO-OFDM System

MIMO-OFDM System the combination of MIMO System and OFDM System, which is used to provide high data rate for channel capacity, good quality for minimize [7] probability of errors, minimize complexity/cost of implementation of proposed system, minimize transmission power required (translates to SNR), and minimize bandwidth (frequency spectrum) used.


### III. SOFTWARE USED

This section provides the information about the software which is using in the work. The software name is MATLAB Software. This software is using because it is easy to use in compare to other software and easy to formed simulation result through coding.

MATLAB a multi-paradigm numerical computing environment and fourth-generation programming language. Developed by MathWorks, MATLAB allows matrix manipulations, plotting of functions and data, implementation of algorithms, creation of user interfaces, and interfacing with programs written in other languages, including C, C++, Java, and Fortran. Although MATLAB is intended primarily for numerical computing, an optional toolbox uses the MuPAD symbolic engine, allowing access to symbolic computing capabilities. An additional package, Simulink, adds graphical multi-domain simulation and Model-Based Design or dynamic and embedded systems. MATLAB has structure data types.<sup>[3]</sup> Since all variables in MATLAB are arrays, a more adequate name is "structure array", where each element of the array has the same field names. Although MATLAB has classes, the syntax and calling conventions are significantly different from other languages. MATLAB has value classes and reference classes, depending on whether the class has handle as a super-class (for reference classes) or not (for value classes). MATLAB supports developing applications with graphical user interface features. MATLAB includes GUIDE (GUI development environment) for graphically designing GUIs. It also has tightly integrated graph-plotting features. For example the function plot can be used to produce a graph from two vectors x and y.

Simulink, developed by MathWorks, is a data flow graphical programming language tool for modeling, simulating and analyzing multi domain dynamic systems [8]. Its primary interface is a graphical block diagramming tool and a customizable set of block libraries. It offers tight integration with the rest of the MATLAB environment and can either drive MATLAB or be scripted from it. Simulink is widely used in control theory and digital signal processing for multidomain simulation and Model-Based Design. MATLAB has several methods for plotting – both in two- and three-dimensional settings. MATLAB's plot function has the ability to plot many types of "linear" two-dimensional graphs from data which is stored in vectors or matrices. The general simulation window of MATLAB is shown below. Run the linear equalizer, and plot the equalized signal spectrum, the BER, and the burst error performance for each data block. Note that as the  $E_b/N_0$  increases, the linearly equalized signal spectrum has a progressively deeper null.

This highlights the fact that a linear equalizer must have many more taps to adequately equalize a channel with a deep null.

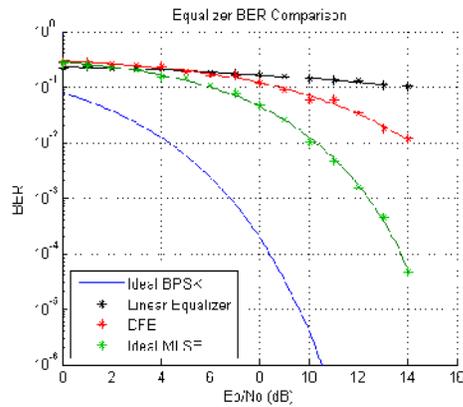

### IV. CONCLUSION

In this paper, is the performance of a precoded closed loop MIMO – OFDM systems is analysed by comparing it with that without precoding. The code was simulated for BPSK, QPSK, 16 PSK and 16 QAM for a 2 x 2 MIMO OFDM system. It was seen that the bit error rate performance obtained is better than that without precoding. In the modulation schemes used the BER performance of BPSK was found to be better than QPSK, 16 PSK and 16 QAM for the same SNR. Although the performance was found to be increasing, still there is a scope for further improvement in BER performance with lower SNR. This needs to be tested with more number of antennas and for varying channel conditions. provide the review of channel estimation. After that next section provide the information about propose work. This work is show that the technique for channel estimation in BPSK-QPSK-PSK 16 & 64 QAM MIMO-OFDM System, which has been increasing the capacity of channel and reduce BER in past. This system use MATLAB software for the coding and simulate the result. The result will may be increases 1 to 3 percent from previous work.

### REFERENCES

- [1]. A. Oberina, M. Moisio, and V. Koivunen, "Performance of Mobile MIMO OFDM Systems with Application to UTRAN LTE Downlink," in *IEEE Transactions on Wireless Communications*, vol. **11**, 2012.
- [2]. A. Oberina, M. Moisio, T. Henttonen, E. Pernila, and V. Koivunen, "MIMO performance evaluation in UTRAN Long Term Evolution," in *In Proc. CISS*, pp. 1179 - 1183, 2008.
- [3]. A. Lozano and N. Jindal, "Transmit diversity vs. spatial multiplexing in modern MIMO systems," in *IEEE Transactions on Wireless Communications*, vol. **9**, pp. 186 - 197, 2010.

- [4]. Wen – Rong Wu, and Tzu – Han Hsu, A Low – complexity Precoder Searching Algorithm for MIMO –OFDM Systems, Personal , Indoor and Mobile Radio Communications, *IEEE 20th International Symposium , September 2009*.
- [5]. Randal T. Becker, Precoding and Spatially Multiplexed MIMO in 3 GPP Long – Term Evolution, High Frequency Electronics, October 2009, 18 – 26.
- [6]. D. Gesbert, M. Shafi, P. J. Smith, A. Nagui, and D. Shan Shiu, “From Theory to Practice: An Overview of MIMO,” in *IEEE Journal of Selected Topics in Communications*, vol. **21**, 2003.
- [7]. Nguyen Quoc Khuong, Nguyen Van Duc, Nguyen QUoc Trung, Vu Thi Minh Tu, “A Precoding method for closed-loop MIMO – OFDM systems”, International Conference on Advanced Technologies for Communications, October 2008 .
- [8]. Chandrasekaran M, Srikanth Subramanian, “Performance of Precoding Techniques in LTE”, Recent Trends in Information Technology (ICRTIT), April 2012, 367 - 371.